



AP182 THREE SIDE ON PALLET

Discover more on AP182 series on <http://www.phoenixlabeling.com/>

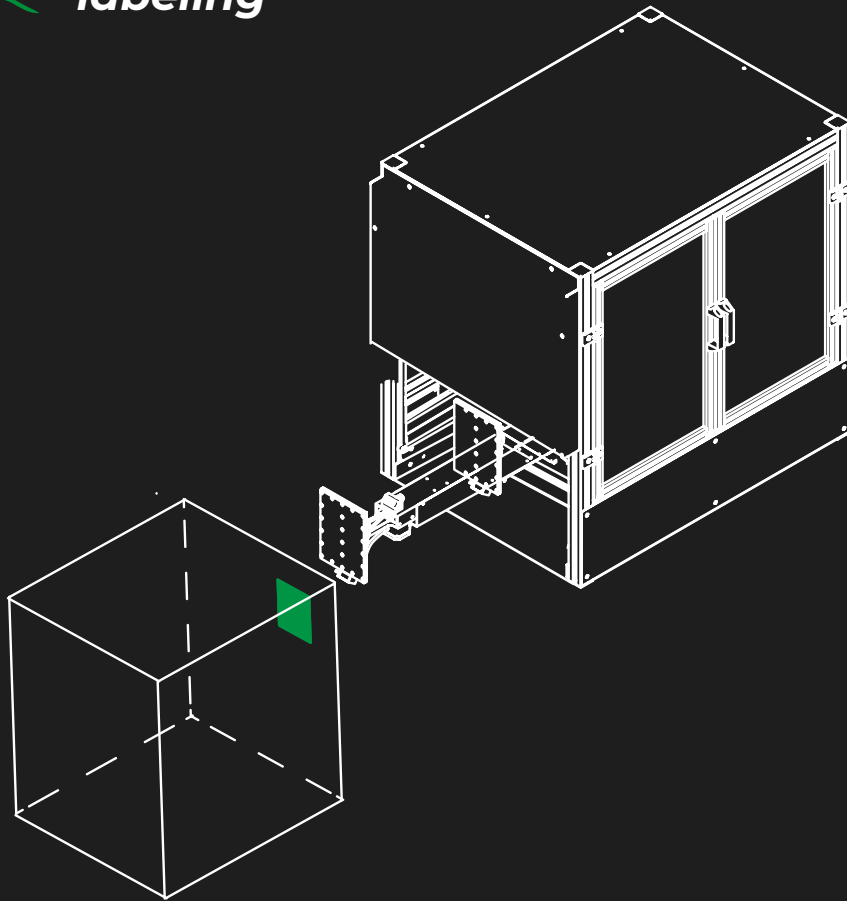

AP182 is an automatic print & apply system, suitable for A5 labels application on multiple sides of a pallet, according to the international logistic identification standards. The complete system is enclosed into a robust aluminium frame to be protected from dust and dirty environments.



Logistic



Chemical



Food & Beverage




Furniture & white goods

The AP182 is designed to print and directly apply the label on pallet in a specific position.

AP182 system can apply on pallet, from one to three sides, and thanks to its fully programmable logic, the label application can be performed, in some conditions, even on moving pallets.

Application type



Front, back & lateral side

API82 THREE SIDE ON PALLET	
Application type	Three side print and apply on pallet
Available version	Right or Left Hand with standard mouting frame X axis: 500 mm Y axis: 640 mm Z axis: 180°
Print resolution	Up to 24 dots/mm (600dpi)
Speed print	Up to 400 mm/second
Label size	UNI ISO A5 150X210 mm
Label roll Ø	External Ø= 300 mm Optional Ø= 350 mm Core Ø= 76 mm
Rewind capabilty	Up 190 mm with external Ø= 300 mm
Application rate	Up to 10 labels/minute
Accuracy	+/- 0,5 mm typical
Dimensions in mm (H x W x D)	987x988x732 (applicator arm in rest position)
Compressed air	Air pressure 6 Bar
Power connection	90-240 VAC. 50-440 Hz
Power consumption	130 Watt @ max rate. 20W in stand by 20-90% relative umidity
Enviromental conditions	temperature 5-35°C NE, DE, FR, NL, NO, SE, RU, PL, ES, TR,
Supported languages	PT, IT, CZ, HR. In option: AZ, FI, HU, LV.