


AL4050 **Motor** applicator

Discover more on 4050 series on <http://www.phoenixlabeling.com/>

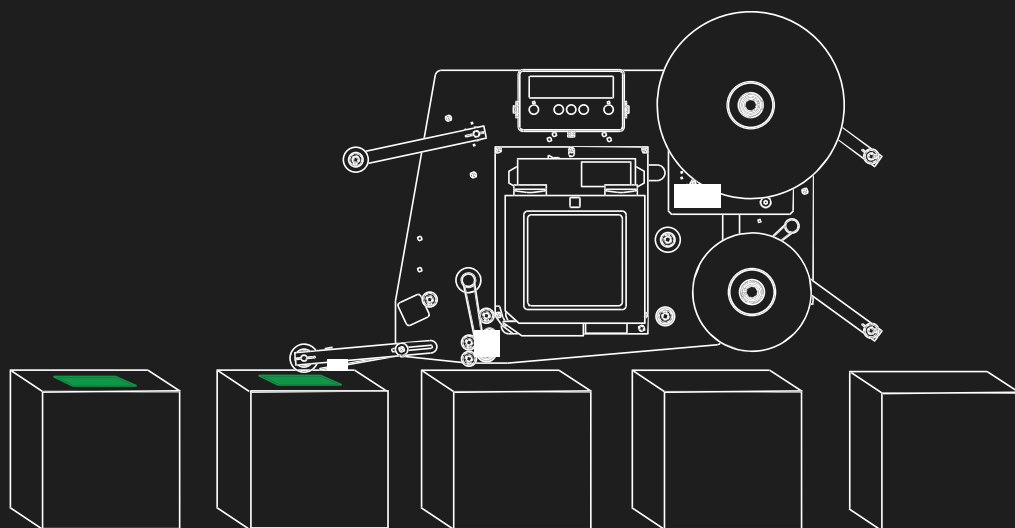

The AL4050 Motor applicator is a printy and apply system of the **4050 series**.

The printing phase is separated from the application phase. The AL4050 prints the labels that are consequently loaded in a buffer and dispensed when required, thanks to a high-performance wipe-on applicator. Phoenix Italia's exclusive technology ensures accuracy through the pulling group and its easy-to-load liner path.



Food & Beverage



Paper, mailing & Graphic



Chemical




Furniture & white goods


The AL4050 Motor applicator is designed to print and directly apply the label on the product in a specific position.

The goods can be labeled on one side: the label can be applied to moving products on the top, on the bottom or on the lateral side.


Application type

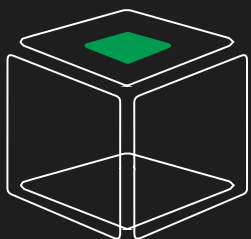

Top side



Bottom side



Lateral side

AL4050 MOTOR WIPE-ON APPLICATOR

Application type	Wipe-on application with motorized applicator
Available version	Right or Left Hand, suitable for 4" to 6" print engines, with standard mounting frame
Print resolution	Up to 24 dots/mm (600dpi)
Speed print	Up to 400 mm/second
Label size	Min 20x20 mm, Max 170x500 mm
Label roll Ø	External Ø= 300 mm Optional Ø= 350 mm Core Ø= 76 mm
Rewind	Up 190 mm with external Ø= 300 mm
capabilty	Dispensing speed up to 50 m/min.
Application rate	Application rate can vary according label dimensions, product speed, print speed and labels per trigger
Accuracy	+/- 0,5 mm typical
Dimensions in mm (H x W x D)	950 x 579 x 382 (4" version) 950 x 579 x 439 (6" version)
Compressed air	Air pressure 6 Bar
Power connection	90-240 VAC. 50-440 Hz
Power consumption	130 Watt @ max rate. 20W in stand by 20-90% relative umidity
Enviromental conditions	temperature 5-35°C NE, DE, FR, NL, NO, SE, RU, PL, ES, TR,
Supported languages	PT, IT, CZ, HR. In option: AZ, FI, HU, LV.